



Aeris Muvman

- Product information
- Product dimensions
- Tender text
- TÜV-GS certificate
- LGA pollutant test certificate
- Care instructions
- Fabric sample overview

# Aeris Muvman Product information



Product information

Sit down. Stand up.  
Do both at once.





# Aeris Muvman Product information

Aeris Muvman

The Aeris Muvman is the smart solution for all work areas that involve long periods of standing and occasional sitting. As a fully-fledged chair, it offers sufficient comfort for short breaks from sitting. The large height adjustment range of 33 cm offers plenty of scope for relieving strain when standing. This makes the stand-up seat ideal for use at standing-only workstations as well as for meetings and presentations.



Product information



The multidimensional movement element in the foot plate ensures maximum lateral mobility, extends the reach and supports the optimum position in relation to the work surface. The rubberised base guarantees stability and is extremely resistant to tipping.

# Aeris Muvman Product information

Aeris Muvman

## Technical Data:

### Product weight

6,3 kg

Version High: 6,5 kg

### Baseplate

Glass fibre reinforced plastic,  
diameter 38 cm

### Seat height

51 – 84 cm

Version High: 60 – 93 cm

### max. user weight

120 kg

### Seat

Seat support: plastic,  
upholstery: PU foam,  
seat surface: 34 × 32 cm

Product information

## Awards and Certifications:





# Aeris Muvman

## Product dimensions

Aeris Muvman

### Dimensions

**Overall height**  
56,5 cm - 89,5 cm



**Overall depth**  
38 cm

**Overall width**  
38 cm

**Seat height - Standard**  
51 cm - 84 cm

**Seat width**  
34 cm

**Seat depth**  
28 cm

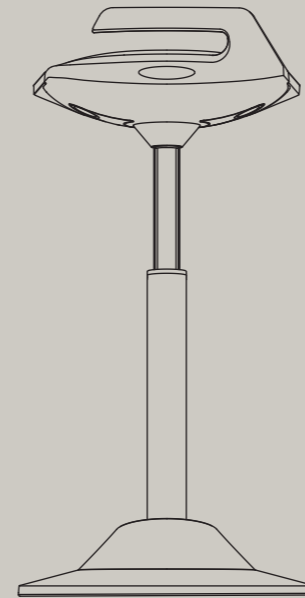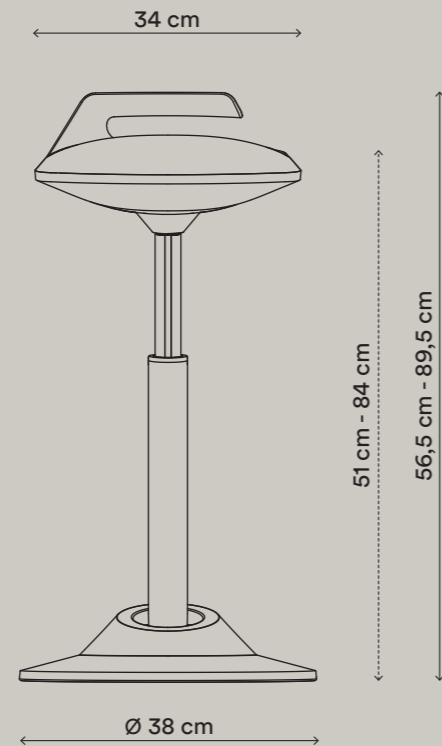


Product dimensions

### Variants

**Standard**  
Seat height 51 cm - 84 cm

**High**  
Seat height 60 cm - 93 cm

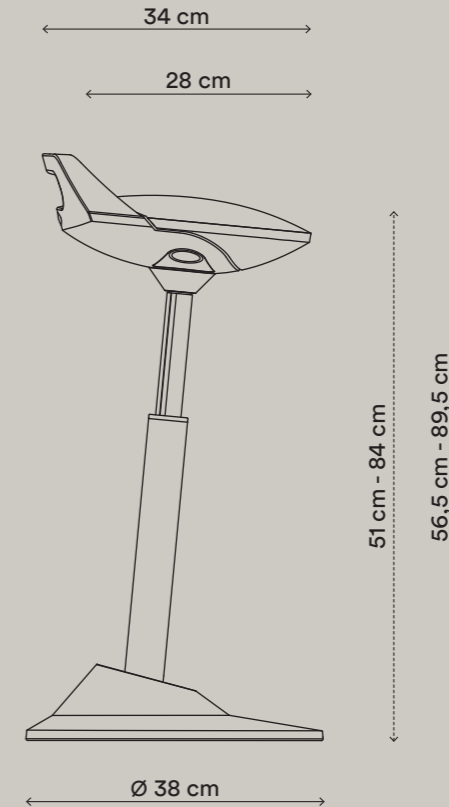

# Aeris Muvman Tender text

Aeris Muvman

## Product type

Active standing seat, without backrest and with large height adjustment range



Tender text

## Product description

The Aeris Muvman is an active standing seat with a height adjustment range of 51 - 84 cm. This variability makes it possible for users to use the Aeris Muvman as a seat or as support. It can be used standing up. It was designed for use in all work areas and offers people of all heights and proportions the right standing and sitting conditions. The centre column is tilted forward by 4° to ensure an upright posture and relieve pressure on the intervertebral discs. The movement joint in the foot plate allows maximum lateral mobility, extends the reach and supports the optimum posture in relation to the work surface.

The seat of the Aeris Muvman has a convex shape and moulds to the user so that there are no pressure points on the thigh and the blood circulation is not impaired. The base is extremely stable and cannot tip over, and a practical carrying handle ensures that the Aeris Muvman can be used flexibly at different workstations.

# Aeris Muvman TÜV-GS certificate

Aeris Muvman

TÜV-GS Zertifikat

Zertifikat		Certificate		 TÜVRheinland®	
Zertifikat Nr.	Certificate No.	Blatt	Sheet		
S 60148372		0001			
Ihr Zeichen	Client Reference	Unser Zeichen	Our Reference	Längstens gültig bis	Latest expiration date
		0010--60354743	002	20.04.2025	(day/mo/yr)
Genehmigungsinhaber			Fertigungsstätte		
License Holder			Manufacturing Plant		
aeris GmbH			aeris GmbH		
Hans-Stießberger-Str. 2 a // 3. OG			Von-Holzapfel-Str. 6		
85540 Haar			86497 Horgau		
Deutschland			Deutschland		
Prüfzeichen		Geprüft nach			
Test Mark		Tested acc. to			
 		2 PFG 1751/10.18			
<small>www.tuv.com ID 111221608</small>		AfPS GS 2019:01 PAK			
Zertifiziertes Produkt (Geräteidentifikation)				Lizenzentgelte - Einheit	
Certified Product (Product Identification)				License Fee - Unit	
<u>Stehhilfe</u>					
Stehhilfe für den Wohn - und Nichtwohnbereich				8	
Typ: Aktiv - Steh - Sitz					
Bezeichnung: „Muvman / Muvman High“ und „Muvman Industry“					
Modell „Muvman“: Bestehend aus: Standfuß Kunststoff mit Gummiprofil, Gasfederaufnahme als flexibles Gummi-Element, Sitzträger Kunststoff mit Gasfederauslösetasten, Polster PU-Formschaum mit Stoff überzogen. Säule mit Gasfeder von Stabilus STAB-O-MAT, DIN 4550-4D mit Rückstellfunktion;					
Modell „Muvman Industry“: Bestehend aus: Sitzträger aus Aluminium- Druckguss mit Gasfederauslösehebel, Polster aus Integralschaum, Fuß aus Alu-Druckguss, Bodengleiter aus Kunststoff, Gasfederaufnahme als flexibles Gummi-Element, Säule mit Gasfeder von Stabilus STAB-O-MAT, DIN 4550-4D mit Rückstellfunktion					
Abmessungen: (HxBxT):					
Modell 311-STGR-CM01 : 850 - 520 x 340 x 305; 6,50 kg					
Modell 311-STBK-AT01 : 910 - 540 x 340 x 305; 7,20 kg					
Ersetzt Zertifikat Nr. S 60102550.					
Parent ID: 0000043485.					
Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde. Produkt und Fertigungsstätte erfüllen § 20 und § 21 des Produktsicherheitsgesetzes. This certificate is based on our Testing and Certification Regulation. Product and production fulfill par § 20 and § 21 of the Product Safety Law.				Zertifizierungsstelle	
TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg Tel.: +49 221 806-1371 e-mail: cert-validity@de.tuv.com Fax: +49 221 806-3935 http://www.tuv.com/safety				 C. Prosch	
Ausstellungsdatum Date of Issue : 21.04.2020 (day/mo/yr)					



# Aeris Muvman LGA pollutant test certificate

Aeris Muvman

LGA pollutant test certificate

**Zertifikat**

**Certificate**



**Zertifikat Nr. Certificate No.**  
TX 60156618

**Blatt Blatt**  
0001

**Ihr Zeichen Client Reference**

**Unser Zeichen Our Reference**  
0010--60442052 001

**Längstens gültig bis Latest expiration date**  
01.09.2026 (day/mo/yr)

**Genehmigungsinhaber License Holder**

aeris GmbH  
Hans-Stießberger-Str. 2 a // 3. OG  
85540 Haar  
Deutschland

**Fertigungsstätte Manufacturing Plant**

aeris GmbH  
Von-Holzappel-Str. 6  
86497 Horgau  
Deutschland

**Prüfzeichen Test Mark**



Emissionsgeprüft  
Schadstoffgeprüft  
Regelmäßige  
Produkt-  
Überwachung  
www.tuv.com  
ID 1111239867

**Geprüft nach Tested acc. to**

2 PIG S 0121/02.19 Schadstoffprüfung gemäß Kriterienkatalog "TÜV Rheinland certified", Produktgruppe "Sitz- und Liegemöbel"

**Zertifiziertes Produkt (Geräteidentifikation)**  
**Certified Product (Product Identification)**

Stuhl / Bürostuhl / Hocker / Stehhilfe / Kinderstuhl

3D-Aktiv-Bürodrehstuhl: Swopper / Swopper mit Lehne (WORK)  
Fußring (Aluminiumdruckguss, pulverbeschichtet) mit Rollen,  
Federbein mit Gasdruckfeder, Sitzträger aus Kunststoff mit  
PU-Formschaumpolsterung und Stoffbezug; Swopper WORK mit  
Rückenlehne aus Kunststoff am Fußring montiert optional mit  
Stoffbezug.

Aktiv-Steh-Sitz: Muvman / Muvman Industry  
Fußsteller aus Kunststoff, glasfaserverstärkt, Mittelsäule  
mit Gasdruckfeder, Sitzträger aus Kunststoff mit PU-Schaum  
gepolstert und Stoffbezug; Muvman Industry Standfuß aus  
Aluminiumdruckguss, pulverbeschichtet schwarz mit  
Universalgleitern, Sitz mit Integralschaum in schwarz.

Aktiv-Kinder-Drehstuhl: Swoppster  
Fußring (Kunststoff, glasfaserverstärkt) mit  
Rollen/Standfüßen, Federbein mit Gasdruckfeder, Sitzträger  
aus Kunststoff mit PU-Schaumpolsterung und Stoffbezug.

Ausgewählte textile Bezugsstoffe der aeris Kollektion.

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde.

**Zertifizierungsstelle**

**TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg**  
Tel.: +49 221 806-1371 e-mail: cert-validity@de.tuv.com  
Fax: +49 221 806-3935 http://www.tuv.com/safety



**Dr. J. Galinkina**

**Ausstellungsdatum Date of Issue : 02.09.2021 (day/mo/yr)**

## Microfibre cover

Optimum care is ensured by using water and pH neutral soapsuds. Stains containing oil and fat should be treated beforehand with ethyl alcohol.

After each cleaning action you should rinse with clear water. Never use chlorinated detergents.

The seat must only be treated damp, not wet, otherwise the materials used under the fabric may be damaged. Therefore, please use only a little bit of water and apply only small amounts of the cleaning detergents.

To avoid edges, please always treat from the edge to the middle.

## Wool blend cover

The cover should ideally only be vacuumed gently at regular intervals using a soft vacuum nozzle. Always remove stains as quickly as possible.

Most types of stains can be easily removed with lukewarm water, possibly with the addition of a pH-neutral cleaning agent. Always use a clean, white cotton cloth for this.

Please press a dry kitchen towel or colorless kitchen paper against the fabric so that moisture and dirt can be absorbed.

## Artificial leather

Please clean the seat only with lukewarm water and a little soapy water using a smooth, lint-free cloth or a soft brush.

Alcohol-based disinfectants can be used.

**Warning:** Do not use harsh cleaning agents based on chlorine, lye, acid, hydrogen peroxide or abrasive cleaners.

## Cleaning of the column:

The centre column is powder-coated and is best cleaned with a soft cloth and a gentle cleaning agent or with white spirit.

**Caution:** The extendable part of the gas strut must not be cleaned!

## Cleaning the stand

Abrasion marks on shoe soles are best removed with a soft eraser or a soft cloth with white spirit.

# Aeris Muvman Fabric sample overview

Aeris Muvman

Fabric sample overview


Select / Gabriel




Comfort / Gabriel



Cura / Gabriel

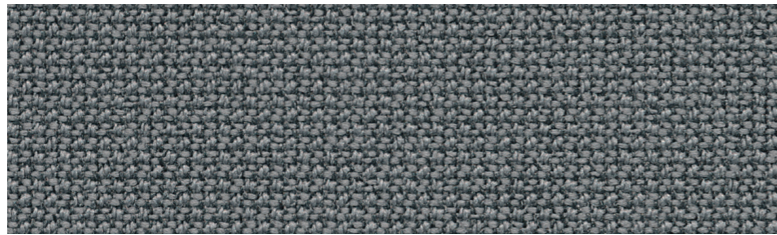

Poro / ATN

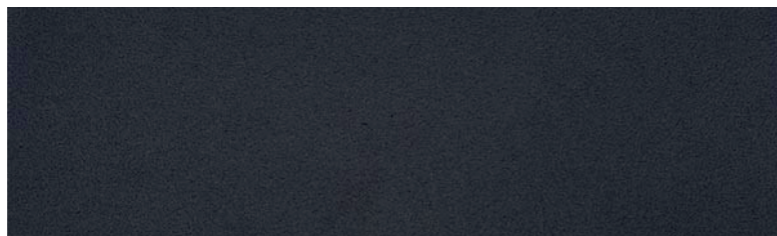


SE01, black  
60999




CM01, black  
0050




CM02, grey  
1012




CM03, red  
1414




CM04, blue  
66004




CM05, green  
8397




CU01, black  
60111




CU02, grey  
melange  
60110




CU04, blue  
melange  
66167




CU14, fern green  
melange  
68181



CU17, light grey  
melange  
60112



AT01, black  
2127






## Gabriel Select features

This impressive material boasts an elegant simplicity that is accompanied by an allround user-friendly design. With an extensive full spectrum color palette, it offers an almost endless variety of possibilities for design, making it fits perfectly with a wide variety of furnishing styles.

Thanks to its superior abrasion resistance, measured by an impressive 200,000 Martindale cycles, this material is extremely durable and resistant, even in heavy-duty environments. It is therefore an ideal choice for Highly frequented rooms such as public areas, offices or restaurants that require a durable solution.

The environmental friendliness of these materials is confirmed by the EU Ecolabel, which makes its production sustainable and environmentally friendly. It also fulfills the STANDARD 100 of OEKO-TEX®, which means that it has been tested for possible harmful substances is considered safe for human use.

## Select-Specifications

Design no.	2498
Composition	85% New Zealand wool / 15% polyamide
Weight	g/lm 510 oz/lin.yd 16.45
Width	cm 140 inches 55
Abrasion	rubs martindale (EN ISO 12947-2) 200.000 ASTM D4966 Martindale (heavy duty) rubs martindale (ASTM D4966) (heavy duty upholstery) 100.000  Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 4 ASTM D4970 Pilling pass
Light fastness	scale 1-8, max. 8 - EN ISO 105-B025-8 AATCC 16 Light fastness pass
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) 4-5/4-5 AATCC 8 or 116 Dry/wet crocking pass
Care instructions	dry cleaning P(S)
Flammability	 BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988 BS 5852 Crib 5 IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO IMO MSC 307(88) Annex 1 part 8 UK MED Certificate IMO UK CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals..
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel

## Gabriel Comfort features

The high-quality fabric was specially developed for intensive use and has outstanding properties. With an impressive Martindale value of 150,000, it is extremely hard-wearing and resistant to abrasion.

Thanks to the use of carbon fibers, the fabric is permanently antistatic, which means that it hardly collects any dust and is therefore particularly easy to clean. Furthermore it is dirt-repellent and water and oil repellent, making it extremely resistant to soiling.

Another plus is its openness to diffusion, which means that the fabric enables excellent air and moisture exchange and thus counteracts the formation of mold.



Safety is a top priority with this fabric, as it is permanently fire-resistant - a property achieved by fire-retardant fibers. It therefore offers a high level of safety and protection.

For the environmentally conscious buyer, it is important to know that this fabric contains 37% recycled fibers, which contributes to the sustainable use of resources.

And to top it all off, the fabric manufacturer offers a generous 10- year guarantee against abrasion and pilling, which further reinforces confidence in the quality of this product.

The fabric also meets the requirements of the renowned STANDARD 100 by OEKO-TEX®, which means that it has been tested for harmful substances and is considered safe for human use.

## Comfort-Specifications

Design no.	8580
Composition	51% polyester/37% post-consumer rec.pes./ 12% polyurethane incl. antistatic fibers and fire retardant fibers in the backside
Weight	g/lm 385 oz/lin.yd 12.42
Width	cm 140 inches 55
Abrasion	rubs martindale (EN ISO 12947-2) 150.000  Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02 5-7
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) 4/4-5
Care instructions	wash or dry cleaning P(W)  most stains can be removed by brushing with a suede brush or using an eraser.  or use a solution of luke-warm water and a neutral detergent.  74°C shrinkage max. 2,5%.  60°C shrinkage max. 2%. 
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette ÖNORM A3800-B2-B3825-Q1 UK NF P 92-503 M3 CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.
Environment	OEKO-TEX® STANDARD 100



## Gabriel Cura features

The Cura fabric cover is characterized by a warm, casual aesthetic that is complemented by a lively melange effect and a soft, voluminous texture.

But this material is not only visually appealing - its high stretchability enables flexible use, making it perfect for office and lounge furniture. But what makes this material special is its sustainability. As much as 98% of the material is made from recycled post-consumer polyester, which makes a significant contribution to reducing waste. In addition, the entire material is 100% recyclable and therefore contributes to a closed-loop economy.

But this material also scores highly in terms of ecological standards. The EU Ecolabel shows that it meets strict environmental criteria and is therefore an environmentally friendly choice. It also fulfills meets the requirements of STANDARD 100 by OEKO-TEX®, which means that it has been tested for possible harmful substances and is considered safe for human use.

## Cura-Specifications

Design no.	2480/2544
Composition	100% post-consumer recycled polyester
Weight	g/lm 420 oz/lin.yd 55
Width	cm 140 inches 55
Abrasion	rubs Martindale (EN ISO 12947-2) 100.000 Double Rubs Wyzenbeek (ASTM D4157-07) (heavy duty upholstery)100.000 ASTM D4157-07 Wyz-abrasion (heavy duty) 100k pass  Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 4-5 ASTM D3511 Pilling pass
Light fastness	scale 1-8, max. 8 - EN ISO 105-B025-8 AATCC 16 Light fastness pass
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) 4-5/4-5 AATCC 8 oder 116 Dry/wet crocking pass
Care instructions	wash or dry cleaning P(W) Cura is made of polyester which is a material suited for environments with special requirements for cleaning.  40°C shrinkage max. 1%.  60°C shrinkage max. 2%.
Flammability	BS EN 1021 1&2 Cigarette and Match CA TB 117-2013 ASTM E 84 Class 1 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel

## ATN Poro features

The ideal cover for easy cleaning - the Poro faux leather impresses with its beautiful and even surface embossing and has a very good grip. The black faux leather cover makes this chair model a robust companion for many years.

## Poro-Specifications

Parameter	Dimension	Method	Value
Weight	g/qm	DIN EN ISO 2286-2	650 ± 50
Fabric (cotton, PES)	g/qm	DIN EN ISO 2286-2	80 - 90
Thickness	mm	DIN EN ISO 2286-3	0,95 - 1,10
Tensile strength - Length - Width	N/5cm	DIN EN ISO 1421/V1	≥ 200 ≥ 150
Tear propagation force - length - width	N	DIN 53363	≥ 25 ≥ 40
- length - width	N	DIN EN ISO 4674	≥ 20 ≥ 15
Adhesive strength - length - width	N/5cm	DIN EN ISO 2411	≥ 30 ≥ 30
Burning behaviour	mm/min	DIN 75200 FMVSS 302 ISO 3795 ÖNORM B3825 DIN/ BS EN 1021 1 + 2 IMO 2010 FTP Code Part 8 NFP 92-503 Franz.Norm	≤ 100 ≤ 100 passed flame retardant (B1) no ignitionno no ignitionno M2
Rubbing fastness - dry - wet		DIN EN ISO 105-X12	i. O. i. O.
Abrasion test (Martindale)	Cykl.	DIN EN ISO 12947-2 BS 5690	≥ 120.000
Light fastness	Blue scale	DIN EN ISO 105-B06	≥ 6
Flexibility Room temp.	Cykl.	DIN EN ISO 32100	≥ 100.000

Select / Gabriel

Gabriel A/S  
Hjulmagervej 55  
9000 Aalborg, DENMARK

DTI TEKSTIL  
TEKNOLOGISK INSTITUT  
GREGERSENSVEJ  
2630 TAASTRUP, DENMARK

**OEKO  
TEX®**

# Certificate

## OEKO-TEX® STANDARD 100

### Gabriel A/S

is granted the OEKO-TEX® STANDARD 100 certification  
and the right to use the trademark.

**SCOPE**  
Piece dyed, yarn dyed and fiber dyed upholstery and  
screen fabrics woven and non-woven of 100% wool,  
wool/polyamide 95-80/5-20%, wool/polyamide/anti-  
static fibres 93-94/4-5/2%, wool/linen/polyamide  
58/35/7%, wool/polyester/cotton 38-86/11-40/7-22%,  
wool/polyester/polyamide 48-54/43-44/2-9%, wool/  
polyester 84/16%, wool/cotton 80/20%, cotton/polyester  
80-86/14-20%; des. Luna Fleur WO/PA 90/10% with all-  
over embroidery.

**PRODUCT CLASS**  
II (products with direct contact to skin) - Annex 4

Further compliance information (REACH, SVHC, POP, GB18401  
etc.) can be found on [oeko-tex.com/en/faq](https://www.oeko-tex.com/en/faq).  
The certificate is based on the test methods and requirements of  
the OEKO-TEX® STANDARD 100 that were in force at the time of  
evaluation.

Taastrup, 2023-05-30

**STANDARD  
100** 1076-17401  
DTI

This certificate 1076-17401 is valid until  
30.06.2024.

**SUPPORTING DOCUMENTS**  
✓ Test report : 174-48  
✓ Declaration of conformity in accordance with  
EN ISO 17050-1 as required by OEKO-TEX®  
✓ OEKO-TEX® Terms of Use (ToU)

Anette Werner  
Senior Consultant Textiles

Allan Jensen  
Consultant

**OEKO-TEX Service GmbH** Genferstrasse 23, CH-8002 Zurich

Comfort / Gabriel

Gabriel A/S  
Hjulmagervej 55  
9000 Aalborg, DÄNEMARK

DTI TEKSTIL  
TEKNOLOGISK INSTITUT  
GREGERSENSVEJ  
2630 TAASTRUP, DÄNEMARK

**OEKO  
TEX®**

# Certificate

## OEKO-TEX® STANDARD 100

### Gabriel A/S

erhält die OEKO-TEX® STANDARD 100 Zertifizierung  
und das Recht zur Nutzung der Marke.

**SCOPE**  
Möbelbezugsstoff Artikel Comfort+ aus 88/12%  
Polyester/Polyurethan in mehreren Farben, mit anti-  
statische und flammhemmende Fasern (von OEKO-  
TEX® akzeptiert) auf der Rückseite und  
Antischmutzausrüstung auf der Vorderseite.

**PRODUKTKLASSE**  
IV (Ausstattungsmaterialien) - Annex 4

Weitere Compliance-Informationen (REACH, SVHC, POP, GB18401  
etc.) finden Sie hier: [oeko-tex.com/en/faq](https://www.oeko-tex.com/en/faq).  
Das Zertifikat basiert auf den zum Zeitpunkt der Zertifizierung  
gültigen Prüfmethoden und Anforderungen des OEKO-TEX®  
STANDARD 100.

Taastrup, 2023-01-24

**STANDARD  
100** 6234-4401  
DTI Dänemark

Dieses Zertifikat 6234-4401 ist gültig bis  
31.01.2024.

**BEGLEITDOKUMENTE**  
✓ Testbericht : 44-31  
✓ Konformitätserklärung gemäß EN ISO 17050-1  
wie von OEKO-TEX® gefordert.  
✓ OEKO-TEX® Allgemeine Nutzungsbedingungen  
(ANB)

Anette Werner  
Senior Consultant Textiles

**OEKO-TEX Service GmbH** Genferstrasse 23, CH-8002 Zurich



Gabriel A/S  
Hjilmagervej 55  
9000 Aalborg, DENMARK



DTI TEKSTIL  
TEKNOLOGISK INSTITUT  
GREGERSSENSVEJ  
2630 TAASTRUP, DENMARK

# Certificate

## OEKO-TEX® STANDARD 100

**Gabriel A/S**

is granted the OEKO-TEX® STANDARD 100 certification  
and the right to use the trademark.

### SCOPE

Woven and knitted upholstery fabrics of 100% polyester.; Woven des. Event, Event Screen+, Step, Step Screen, Step Melange, Step Melange Screen, Twist, Twist Melange, Go Check, Go Uni, Go Couture, Spin & Contour. Knitted des. Atlantic, Flex, Sync, Sync EU, Athlon & Athlon Plus; upholstery fabrics Step, Step Screen, Step Melange, Step Melange Screen, Twist, Twist Melange, Go Check, Go Uni, Go Couture, Spin & Sync EU are made of yarns with flame retardant properties accepted by OEKO-TEX®

### PRODUCT CLASS

II (products with direct contact to skin) - Annex 4



This certificate 876-13601 is valid until  
31.08.2024.

### SUPPORTING DOCUMENTS

- ✓ Test report : 136-51
- ✓ Declaration of conformity in accordance with EN ISO 17050-1 as required by OEKO-TEX®
- ✓ OEKO-TEX® Terms of Use (ToU)

Anette Werber  
Senior Consultant Textiles

Maria Rahbek Pedersen  
Consultant


Further compliance information (REACH, SVHC, POP, GB18401 etc.) can be found on [oeko-tex.com/en/faq](http://oeko-tex.com/en/faq).

The certificate is based on the test methods and requirements of the OEKO-TEX® STANDARD 100 that were in force at the time of evaluation.

Taastrup, 2023-08-14



# Never just sit.

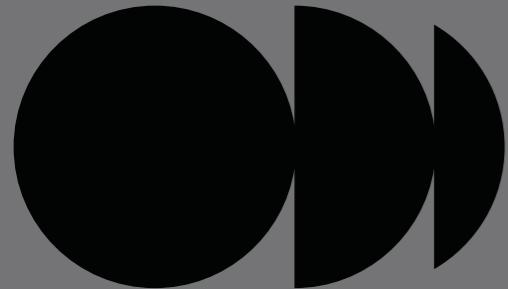

Aeris GmbH  
Hans-Stießberger-Straße 2a  
85540 Haar  
Germany

Tel.: +49 (0) 89 - 900506 - 0  
[info@aeris.de](mailto:info@aeris.de)  
[en.aeris.de](http://en.aeris.de)